
Gamma Radiation Safety Study Guide, second edition Text Corrections

The following text correction applies to *Gamma Radiation Safety Study Guide, second edition*, third printing. Subsequent printings of the document will incorporate the corrections into the published text.

Page 24
Figure 4.3 should be changed as indicated.

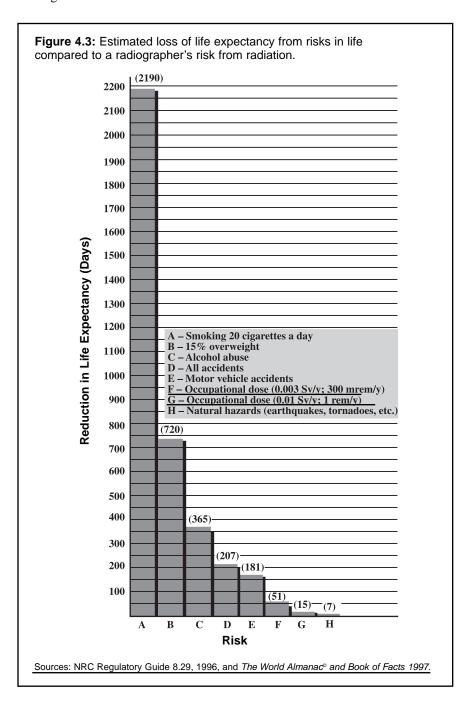

Page 51

In Table 8.2: Warning label use, the Transport Index for Yellow II Label and Yellow III Label should be changed as indicated.

Transport Index	Maximum Radiation Level at Any Point on the External Surface
White I Label	
0	$\leq 0.5 \text{ mR/h} (\leq 0.005 \text{ mSv/h})$
Yellow II Label	
> 0 but ≤ 1	> 0.5 mR/h but ≤ 50 mR/h (> 0.005 mSv/h but ≤ 0.5 mSv/h)
Yellow III Label	
> 1 but ≤10	> 50 mR/h but ≤ 200 mR/h (>0.5 mSv/h but ≤ 2.0 mSv/h)
Yellow III Label (must be shipped under exclusive use provisions)	
> 10	$> 200 \text{ mR/h} \le 1000 \text{ mR/h}$ (>2.0 mSv/h but $\le 10 \text{ mSv/h}$)

Page 73

In the Answers to Review Questions, two answers are incorrect.

- The answer to Chapter 4, Question 7 should be <u>a</u>.
- The answer to Chapter 6, Question 3 should be <u>b</u>.

Catalog #235R revised 07/04 page 2 of 2